

JOB NO.: TCS01062/19

EPD CONTRACT NO. EP/SP/86/15 ORGANIC WASTE TREATMENT FACILITIES PHASE 2

QUARTERLY ENVIRONMENTAL MONITORING AND AUDIT (EM&A) SUMMARY REPORT

(JUNE 2025 TO AUGUST 2025)

PREPARED FOR

AJA JOINT VENTURE

Date Reference No. Prepared By Certified By

8 October 2025 TCS01062/19/600/R0483v2

Martin Li (Environmental Consultant)

Tam Tak Wing (Environmental Team Leader)

Version	Date	Remarks
1	30 September 2025	First Submission
2	8 October 2025	Amended as per IEC's comments

Your ref TCS1062/19/300/L0484 Our ref 271491/02-09/RC/NL-6186

File ref 02-09

ARUP

Level 5 Festival Walk
80 Tat Chee Avenue
Kowloon Tong
Kowloon
Hong Kong

t +852 2528 3031
d +852 2268 3437
f +852 2268 3380
ricky-kh.chui@arup.com
www.arup.com

BY EMAIL (samuel.wu01@cohl.com)

AJA Joint Venture 5/F, Tower A, Manulife Financial Centre 223-231 Wai Yip Street Kwun Tong, Kowloon Hong Kong

Attn: Mr. Samuel Wu

9 October 2025

Dear Sir

Contract No. EP/SP/86/15 Organic Waste Treatment Facilities Phase 2 Quarterly Environmental Monitoring & Audit Report (June 2025 to August 2025)

Referring to your report referenced above dated 8 October 2025, we hereby verify that the captioned report ref. no. TCS01062/19/600/R0483v2 complied in general with the requirements as set out in the EM&A Manual.

Should you have any queries, please contact the undersigned at 2268 3437.

Yours faithfully

Ricky Chui

Independent Environmental Checker

cc EPD – Ms. Winnie Chu, Mr. Jason Tsang, Mr. Gilbert Wong Mr. David Ng

Ms. Anita Chan, Mr. James Yip, Mr. Chow Ting Sing Mr. Chu Shun Hang, Mr. Arthur Lau, Mr. LI Hon Kit

Wif. Chu Shun Hang, Wif. Arthur Lau, Wif. Li Hon Kit

AECOM – Mr. Desmond Ng, Mr. K. C. Chu, Mr. YW Mok, Mr. Joe Lam

Ms. Rachel Zu

AJA JV – Mr. Lee Wing Yan, Mr. Joe Mak, Mr. Larsson Sun, Mr. Eric Chau

Ms. Beth Biddle, Ms. Tso So Fong, Ms. Cindy Kam

Mr. Gabriel Wong

AUES – Mr. T.W. Tam, Mr. Martin Li



EXECUTIVE SUMMARY

ES01 This is the 23rd Quarterly Environmental Monitoring and Audit (EM&A) Summary Report for the Service Contract to summarized environmental monitoring results and inspection findings during the period from 1 June to 31 August 2025 (hereinafter 'the Reporting Period').

ENVIRONMENTAL MONITORING AND AUDIT ACTIVITIES

ES02 Environmental monitoring activities under the EM&A program in this Reporting Period are summarized in the following table.

Table ES-1 Summary of Environmental Monitoring Activities Undertaken in the Reporting Period

Issues	Environmental Monitoring Parameters / Inspection	Sessions
Construction Noise	Leq (30min) Daytime	56
Construction Noise during Restricted Hours	Leq (5min) during restricted hours 19:00-07:00 including public holidays and Sundays	0
Inspection / Audit	ET Regular Environmental Site Inspection	13

BREACH OF ACTION AND LIMIT (A/L) LEVELS

ES03 No construction noise monitoring exceedance was recorded as no noise complaint was received in this Reporting Period. The statistics of environmental exceedance and investigation of exceedance are summarized in the following table.

Table ES-2 Summary of Environmental Monitoring Parameter Exceedance in the Reporting Period

Environmental	Monitoring	Action	Limit	Event & Action	
Issues	Parameters	Level	Level	Investigation Results	Corrective Actions
Construction	Leq _{30min} Daytime	0	0	NA	NA
Noise	Leq _{5min} Restricted hour	0	0	NA	NA

SITE INSPECTION

During the Reporting Period, weekly joint site inspections were undertaken to evaluate the site environmental performance. No non-compliances were observed during the weekly site inspection and environmental audit of the Reporting Period. Minor deficiencies found in the weekly site inspection were in general rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.

ENVIRONMENTAL COMPLAINT

ES05 One (1) environmental complaint was recorded in this Reporting Period for the Project. The statistics of environmental complaint are summarized in the following table.

Table ES-3 Summary of Environmental Complaint Records in the Reporting Period

Donouting Donied	Environ	Related with the		
Reporting Period	Frequency	Cumulative	Complaint Nature	Works Contract
1 – 30 June 2025	0	8	NA	NA
1 – 31 July 2025	0	8	NA	NA
1 – 31 August 2025	1	9	Odour	No



NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

ES06 No environmental summons or prosecutions was received in this Reporting Period for the Project.

The statistics of environmental summons or prosecutions are summarized in the following tables.

Table ES-4 Summary of Environmental Summons Records in the Reporting Period

Donouting Dovied	Environ	Related with the		
Reporting Period	Frequency	Cumulative	Complaint Nature	Works Contract
1 – 30 June 2025	0	0	NA	NA
1 – 31 July 2025	0	0	NA	NA
1 – 31 August 2025	0	0	NA	NA

Table ES-5 Summary of Environmental Prosecutions Records in the Reporting Period

Donouting Dovied	Environi	Related with the		
Reporting Period	Frequency	Cumulative	Complaint Nature	Works Contract
1 – 30 June 2025	0	0	NA	NA
1 – 31 July 2025	0	0	NA	NA
1 – 31 August 2025	0	0	NA	NA

REPORTING CHANGE

ES07 No reporting change was made in this Reporting Period.

FUTURE KEY ISSUES

- ES08 Construction noise would be a key environmental issue during construction work of the Project. Noise mitigation measures such as using quiet plants should be implemented in accordance with the EM&A requirement.
- ES09 In addition, all effluent discharge from the construction site shall fulfill the discharge license stipulation.



Table of Contents

1.	INTROI	DUCTION	1
	1.1	PROJECT BACKGROUND	1
	1.2	REPORT STRUCTURE	1
2.	PROJEC	CT ORGANIZATION AND CONSTRUCTION PROGRESS	2
	2.1	PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS	2
	2.2	CONSTRUCTION PROGRESS	2
	2.3	SUMMARY OF ENVIRONMENTAL SUBMISSIONS	2
3.	SUMMA	ARY OF IMPACT MONITORING REQUIREMENTS	4
	3.1	GENERAL	4
	3.2	MONITORING PARAMETERS	4
	3.3	MONITORING LOCATIONS	4
	3.4	MONITORING FREQUENCY AND PERIOD	4
	3.5	MONITORING EQUIPMENT	4
	3.6	ACTION/LIMIT (A/L) LEVELS	5
4.	CONSTI	RUCTION NOISE MONITORING	6
	4.1	GENERAL	6
	4.2	RESULTS OF NOISE MONITORING	6
5.	WASTE	MANAGEMENT	7
	5.1	GENERAL WASTE MANAGEMENT	7
	5.2	RECORDS OF WASTE QUANTITIES	7
6.	SITE IN	SPECTION	8
	6.1	REQUIREMENTS	8
	6.2	FINDINGS / DEFICIENCIES DURING THE REPORTING PERIOD	8
7.	ENVIR	ONMENTAL COMPLAINT, NOTIFICATIONS OF SUMMONS AND SUCCES	SFUL
	PROSEC	CUTIONS	9
	7.1	Environmental Complaint, Summons and Prosecution	9
EN	VIRONM	ENTAL MITIGATION IMPLEMENTATION SCHEDULE	10
	7.2	GENERAL REQUIREMENTS	10
8.	CONCL	USIONS AND RECOMMENDATIONS	11
	8.1	Conclusions	11
	8.2	RECOMMENDATIONS	11



LIST OF TABLES

Table 2-1	STATUS OF ENVIRONMENTAL LICENSES AND PERMITS OF THE PROJECT
TABLE 3-1	SUMMARY OF EM&A REQUIREMENTS
TABLE 3-2	IMPACT MONITORING STATIONS - CONSTRUCTION NOISE
TABLE 3-3	ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE
TABLE 4-1	SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS
TABLE 4-2	SUMMARIES OF CONSTRUCTION NOISE ACTION/LIMIT LEVEL EXCEEDANCE
TABLE 5-1	SUMMARY OF QUANTITIES OF INERT C&D MATERIALS
TABLE 5-2	SUMMARY OF QUANTITIES OF C&D WASTES
TABLE 6-1	SITE OBSERVATIONS DURING THE WEEKLY INSPECTION
Table 7-1	STATISTICAL SUMMARY OF ENVIRONMENTAL COMPLAINTS
TABLE 7-2	STATISTICAL SUMMARY OF NOTIFICATION OF SUMMONS
TABLE 7-3	STATISTICAL SUMMARY OF SUCCESSFUL PROSECUTION
TABLE 8-1	ENVIRONMENTAL MITIGATION MEASURES

LIST OF APPENDICES

APPENDIX A	LAYOUT PLAN OF THE PROJECT
APPENDIX B	ORGANIZATION CHART
APPENDIX C	MONITORING LOCATIONS FOR IMPACT MONITORING
APPENDIX D	REMAINING ROLLING CONSTRUCTION PROGRAMME
APPENDIX E	GRAPHICAL PLOTS OF MONITORING RESULTS
APPENDIX F	METEOROLOGICAL INFORMATION
APPENDIX G	WASTE FLOW TABLE
APPENDIX H	ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE



1. INTRODUCTION

1.1 PROJECT BACKGROUND

- 1.1.1 Environmental Protection Department (hereinafter referred as "EPD") is the Project Proponent for the Project "Organic Waste Treatment Facilities Phase 2" (hereinafter referred as "the Project"). The Project is a Designated Project to be implemented under Environmental Permit No. EP-460/2013 (hereinafter referred as "the EP"). The major construction work of the Project included:
 - (i) Demolition and removal of the existing above ground structures of the Sha Ling Livestock Waste Composting Plant (SLCP);
 - (ii) Construction of superstructure for an administration building and enclosed waste reception area;
 - (iii) Installation of treatment facilities including waste pre-treatment equipment, digesters, biogas holding tanks, composting, wastewater treatment, air treatment systems; and
 - (iv) Facilities for biogas processing, utilization and transmission;
- 1.1.2 AJA Joint Venture (hereinafter referred as "AJAJV") has been awarded the *EPD Contract No. EP/SP/86/15* "Organic Waste Treatment Facilities Phase 2". In accordance with the Works Contract requirements, AJAJV shall take over the responsibility of the EP. Based on the requirement, Further Environmental Permit application was submitted by AJAJV to EPD on 10 September 2019 and granted on 2 October 2019. A variation of Further Environmental Permit was submitted on 21 August 2020 and granted on 14 September 2020. The Further Environmental Permit is named as FEP-01/460/2013/A.
- 1.1.3 According to the approved Environmental Monitoring and Audit Manual (hereinafter referred as "the EM&A Manual"), AJAJV employed Action-United Environmental Services & Consulting (hereinafter referred as "AUES") as Environmental Team (hereinafter referred as "ET") to implement monitoring programme and as well as the associated duties.
- 1.1.4 According to the EM&A Manual, construction noise was identified as the only key environmental issue during the construction phase of the Project and it is required to carry out construction noise monitoring throughout the construction phase. Furthermore, baseline noise monitoring as part of the EM&A programmes shall be conducted prior to the commencement of the construction works under the Project. Thus, baseline noise monitoring was conducted by ET from 25 September 2019 to 8 October 2019. The baseline monitoring report compiled by the ET was verified by Independent Environmental Checker (hereinafter the "IEC") and was submitted to EPD on 19th November 2019 for endorsement.
- 1.1.5 This is the 23rd Quarterly EM&A Summary Report for the Service Contract to summarized monitoring results and inspection findings during the period from 1 June 2025 to 31 August 2025 (hereinafter 'the Reporting Period').

1.2 REPORT STRUCTURE

- 1.2.1 The Monthly Environmental Monitoring and Audit (EM&A) Report is structured into the following sections:-
 - **Section 1** Introduction
 - Section 2 Project Organization and Construction Progress
 - Section 3 Summary of Impact Monitoring Requirements
 - **Section 4** Construction Noise Monitoring
 - Section 5 Waste Management
 - **Section 6** Site Inspections
 - Section 7 Environmental Complaints and Non-Compliance
 - Section 8 Implementation Status of Mitigation Measures
 - Section 9 Conclusions and Recommendations



2. PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS

2.1 PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS

2.1.1 Organization structure and contact details of relevant parties with respect to on-site environmental management are shown in *Appendix B*. Details of responsibilities of respective parties can be referred to EM&A Monthly Report.

2.2 CONSTRUCTION PROGRESS

2.2.1 Remaining Rolling Construction program of the Project is enclosed in *Appendix D*; and the major construction activities undertaken in the Reporting Period is presented as below:

June 2025

- Granulation Building:
 - Testing and Commissioning works
 - Signatures Installation works
- Reception Building:
 - Painting works
 - Soft Landscape works
 - Testing and Commissioning works

July 2025

- Reception Building:
 - Painting works
 - Testing and Commissioning works
- Granulation Building:
 - Signatures Installation works
 - Testing and Commissioning works
- AD Tank:
 - External Cladding Installation works

August 2025

- Reception Building:
 - Painting works
 - Testing and Commissioning works
- Granulation Building:
 - Signatures Installation works
 - Testing and Commissioning works
- AD Tank:
 - External Cladding Installation works



2.3 SUMMARY OF ENVIRONMENTAL SUBMISSIONS

2.3.1 Summary of the relevant permits, licenses, and/or notifications on environmental protection for the Project of contract 1 are presented in *Tables 2-1*.

Table 2-1 Status of Environmental Licenses and Permits of the Project

		I	License/Po	ermit Sta	tus
Item	Description	Permit no./	Valid	Period	
Item	Description	account no./ Ref. no.	From	То	Status
1	Notification pursuant to Air pollution Control (Construction Dust) Regulation	Application No. 448863	9 Sep 2019	NA	Valid
2	Chemical Waste Producer Registration	Ref. No. 5211- 641-A2957-01	9 Oct 2019	NA	Valid
3	Water Pollution Control Ordinance - Discharge License	Application No. 448913			Application made on 10 Sep 2019
4	Waste Disposal Regulation - Billing Account for Disposal of Construction Waste	Account No. 7035307	2 Oct 2019	NA	Valid
5	Further Environmental Permit	FEP- 01/460/2013/A	14 Sep 2020	NA	Valid
6	Waste Water Discharge License	WT00045315- 2024	7 Oct 2024	31 Jan 2029	Valid



3. SUMMARY OF IMPACT MONITORING REQUIREMENTS

3.1 GENERAL

3.1.1 According to Environmental Monitoring and Audit requirements set out in the Approved EM&A manual, construction noise was identified as the only key environmental issues during the construction phase of the Project.

3.2 MONITORING PARAMETERS

3.2.1 The construction noise monitoring requirement stated in the approved EM&A Manual is summarized in *Table 3-1*.

Table 3-1 Summary of EM&A Requirements

Environmental Issue	Parameters
Noise	 Leq(30min) in normal working days (Monday to Saturday) 07:00-19:00 except public holiday Supplementary information for data auditing, statistical results such as L₁₀ and L₉₀ shall also be obtained for reference Leq(5min) if construction works are extended to restricted hours 19:00-07:00 including public holidays and Sundays

3.3 MONITORING LOCATIONS

3.3.1 According to the EM&A Manual Section 4.2.3, four (4) designated noise sensitive receivers (NSR) were recommended as construction noise monitoring stations. Since two of the designated monitoring locations N2 and N3 were found not accessible, alternative monitoring locations N2a and N3a were therefore proposed for the noise monitoring and were approved by EPD on 1 June 2021. Details of the locations for construction noise monitoring in the Reporting Period is listed in *Table 3-2* and showed in *Appendix C*.

Table 3-2 Impact Monitoring Stations – Construction Noise

ID	Location
N1	Village House No. 308, Sha Ling
N2a	Village House No. 318, Sha Ling
N3a	Village House No. 261, Sha Ling
N4	Village House in Sha Ling

3.4 MONITORING FREQUENCY AND PERIOD

- 3.4.1 Noise monitoring shall be conducted at the all available designated monitoring stations or alternative locations. The monitoring frequency shall depend on scale of the construction activities. According to EM&A manual, regular noise monitoring should be carried out once a week when noise generating activities are underway and the monitoring requirement is presented below:
 - one set of Leq_(30min) measurements between 07:00 and 19:00 hours on normal weekdays
- 3.4.2 If construction works are extended to restricted hours 19:00-07:00 in normal working days (Monday to Saturday), and 00:00-24:00 during public holidays including Sunday, additional weekly impact monitoring should be carried out during the respective restricted hour periods. Leq_(5min) measurements should be employed during the restricted hours.

3.5 MONITORING EQUIPMENT

3.5.1 Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. The sound level meter shall be checked using an acoustic calibrator. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in ms⁻¹.



3.6 ACTION/LIMIT (A/L) LEVELS

3.6.1 Action and Limit levels for construction noise as stipulated in the approved Environmental Monitoring and Audit Manual are listed in *Tables 3-3*.

Table 3-3 Action and Limit Levels for Construction Noise

Monitoring Location	Action Level Limit Level in dB(A)				
Time Period:	0700-1900 hours on normal weekdays				
N1					
N2a	When one or more documented	75 ID(A)			
N3a	complaints are received	75 dB(A)			
N4					
Time Period:	19:00-07:00 in normal working days (Monday to Saturday), and 00:00- 24:00 during public holidays including Sunday				
N1					
N2a	When one or more documented	(A ID(A)			
N3a	complaints are received	60 dB(A)			
N4					

Note: If works are to be carried out during restricted hours, the conditions stipulated in the construction noise permit issued by the Noise Control Authority should be followed.



4. CONSTRUCTION NOISE MONITORING

4.1 GENERAL

4.1.1 In the Reporting Period, construction noise monitoring was performed at monitoring location N1, N2a, N3a and N4. Since no construction works were carried out during restricted hours, no additional weekly noise monitoring was performed in the reporting period.

4.2 RESULTS OF NOISE MONITORING

4.2.1 In the Reporting Period, a total of **56** sessions of daytime construction noise monitoring were performed at the agreed monitoring locations in the reporting period. The daytime noise monitoring results are summarized in **Table 4-1**, respectively. The graphical plots of construction noise monitoring result are shown in **Appendix E**.

Table 4-1 Summary of Construction Noise Monitoring Results

Monitoring	Leq, 30min (dB((A))			
Location	Min	Max		
N1	60.1	65.4		
Record Date	23-Jun-25	9-Jul-25		
N2a	55.4	62.9		
Record Date	10-Jun-25	18-Aug-25		
N3a	64.6	72.0		
Record Date	28-Jun-25	18-Aug-25		
N4	59.3	67.7		
Record Date	14-Jul-25	17-Jun-25		

- 4.2.2 As shown in *Table 4-1*, all the measured results during normal daytime were below 75 dB(A) of the acceptance criteria. Since no construction works were carried out during restricted hours, no additional weekly noise monitoring during restricted hours was performed in the reporting period. No adverse weather condition which may affect the monitoring result was encountered during the course of noise monitoring in the reporting period.
- 4.2.3 No documented noise complaint is received in the reporting period. Hence no construction noise monitoring action level exceedance was recorded. Summary of A/L Level exceedance of construction noise and statistical analysis of compliance for construction noise monitoring results are summarized in *Table 4-2*.

Table 4-2 Summaries of Construction Noise Action/Limit Level Exceedance

Station	Limit Level	Action Level	Received Date	
N1	0			
N2a	0	0	NI A	
N3a	0	U	NA	
N4	0			



5. WASTE MANAGEMENT

5.1 GENERAL WASTE MANAGEMENT

5.1.1 Waste management was carried out by an on-site Environmental Officer or an Environmental Supervisor from time to time.

5.2 RECORDS OF WASTE QUANTITIES

- 5.2.1 All types of waste arising from the construction work are classified into the following:
 - Construction & Demolition (C&D) Material;
 - Chemical Waste; and
 - General Refuse
- 5.2.2 The quantities of waste for disposal in this Reporting Period are summarized in *Tables 5-1* and *5-2*.

Table 5-1 Summary of Quantities of Inert C&D Materials

	Quantity				
Type of Waste	Jun 2025	Jul 2025	Aug 2025	Disposal Location	
Total C&D Materials (Inert) ('000m ³)	0.006	0	0.004	-	
Reused in this Contract (Inert) ('000m ³)	0	0	0	-	
Reused in other Projects (Inert) ('000m ³)	0	0	0	-	
Disposal as Public Fill (Inert) ('000m ³)	0.006	0	0.004	TM38	

Table 5-2 Summary of Quantities of C&D Wastes

	Quantity				
Type of Waste	Jun 2025	Jul 2025	Aug 2025	Disposal Location	
Recycled Metal ('000kg)	0	0	0	-	
Recycled Paper / Cardboard Packing ('000kg)	0	0	0	-	
Recycled Plastic ('000kg)	0	0	0	-	
Chemical Wastes ('000kg)	0	0	0	-	
General Refuses ('000m ³)	0.024	0.003	0.005	NENT	



6. SITE INSPECTION

6.1 REQUIREMENTS

6.1.1 According to the approved EM&A Manual, the environmental site inspection shall be formulated by ET Leader. Weekly environmental site inspections should be carried out to confirm the environmental performance.

6.2 FINDINGS / DEFICIENCIES DURING THE REPORTING PERIOD

- 6.2.1 In the Reporting Period, 13 events of joint site inspection by the Employer's Representative (ER), ET, IEC and the Contractor were undertaken for the Contract to evaluate the site environmental performance. No non-compliance was identified during the site inspection. The summaries of findings / deficiencies recorded in the site inspection during the Reporting Period are presented in **Table 6-1**.
- 6.2.2 The findings / deficiencies of the Project observed during the weekly site inspection are listed in *Table* 6-1.

Table 6-1 Summary of Reminders/Observations of Site Inspection in Reporting Period

Reporting Period	Date of site inspection	Nos. of findings / reminders	Follow-Up Status
June 2025	4, 11, 17, 26 June 2025	2	Completed
July 2025	3, 10, 15, 23, 30 July 2025	1	Completed
August 2025	6, 13, 20, 27 August 2025	0	Completed



7. ENVIRONMENTAL COMPLAINT, NOTIFICATIONS OF SUMMONS AND SUCCESSFUL PROSECUTIONS

7.1 Environmental Complaint, Summons and Prosecution

7.1.1 In the Reporting Period, one (1) environmental complaint was received with respect to odour emission from the project. Besides, no summon and prosecution under the EM&A Programme was lodged for the Project.

Complaint received on 4 August 2025

- 7.1.2 Environmental complaint was received by EPD regarding the potential odour emission from the Project's facility.
- 7.1.3 Upon received the complaint, the Contractor carried out site inspection within the site boundary of the Project on 6 August 2025 and no abnormal odour was identified. The Contractor and on-site EPD Team also carried out site visit at the nearby Village House No. 308 and No. 318, and area near San Uk Ling Holding Centre on 7 August 2025. No odour perceived at Village House No. 308 and 318, and slight intermittent fishy smell was detected at a temporary storage area near a still water fishpond (Lamp Post VG2143)
- 7.1.4 Regularly monthly odour patrol by independent party was carried out on 11 August 2025 and no level 2 odour intensity was identified. Ad-hoc odour patrol by independent party for the Project was carried out on 15 August 2025 and a moderate odour was detected. No level 2 odour intensity was detected in the subsequent patrol on the same day.
- 7.1.5 The investigation revealed that the complaint was considered unlikely due to the Project. Nevertheless, the Contractor will continue conducting routine site inspections within the facility's boundaries to identify any potential sources of odour nuisance and review the findings from odour patrols to determine the number and locations of odour patrol monitoring points.
- 7.1.6 The statistical summary table of environmental complaint is presented in *Tables 7-1*, 7-2 and 7-3.

Table 7-1 Statistical Summary of Environmental Complaints

Donouting Dowled	Environmental Complaint Statistics			
Reporting Period	Frequency Cumulative		Complaint Nature	
June 2025	0	8	NA	
July 2025	0	8	NA	
August 2025	1	9	Odour	

Table 7-2 Statistical Summary of Notification of Summons

Donouting Donied	Environmental Summons Statistics			
Reporting Period	Frequency Cumulative		Summons Nature	
June 2025	0	0	NA	
July 2025	0	0	NA	
August 2025	0	0	NA	

Table 7-3 Statistical Summary of Successful Prosecutions

Donauting Davied	Environmental Prosecution Statistics				
Reporting Period	Frequency Cumulative Prosecution				
June 2025	0	0	NA		
July 2025	0	0	NA		
August 2025	0	0	NA		



8. ENVIRONMENTAL MITIGATION IMPLEMENTATION SCHEDULE

8.1 GENERAL REQUIREMENTS

- 8.1.1 The environmental mitigation measures that recommended in the Environmental Mitigation Implementation Schedule (EMIS) in the approved EM&A Manual covered the issues of dust, noise, water and waste and they are summarized presented in *Appendix H*.
- 8.1.2 AJAJV had been implementing the required environmental mitigation measures according to the Environmental Monitoring and Audit Manual subject to the site condition. Environmental mitigation measures generally implemented by AJAJV in this Reporting Period are summarized in *Table 8-1*.

Table 8-1 Environmental Mitigation Measures

Issues	Environmental Mitigation Measures
Water Quality	 Any wastewater generated should be appropriately treated by treatment facilities; Drainage channels were provided to convey run-off into the treatment facilities; and Drainage systems were regularly and adequately maintained.
Air Quality	 Regular watering to reduce dust emissions from all exposed site surface, particularly during dry weather; Frequent watering for particularly dusty construction areas and areas close to air sensitive receivers; Cover all excavated or stockpile of dusty material by impervious sheeting or sprayed with water to maintain the entire surface wet; Public roads around the site entrance/exit had been kept clean and free from dust; and Tarpaulin covering of any dusty materials on a vehicle leaving the site.
Noise	 Good site practices to limit noise emissions at the sources; Use of quite plant and working methods; Use of site hoarding or other mass materials as noise barrier to screen noise at ground level of NSRs; Use of shrouds/temporary noise barriers to screen noise from relatively static PMEs; Alternative use of plant items within one worksite, where practicable.
Waste Management	• Any excavated material should be reused on site as far as possible to minimize off-site disposal. Scrap metals or abandoned equipment should be recycled if
	 possible; Waste arising should be kept to a minimum and be handled, transported and disposed of in a suitable manner; Trip ticket system for the disposal of C&D materials to any designed public filling facility and/or landfill was implemented; and Chemical waste shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes.
General	The site was generally kept tidy and clean.



9. CONCLUSIONS AND RECOMMENDATIONS

9.1 CONCLUSIONS

- 9.1.1 This is the 23rd Quarterly Environmental Monitoring and Audit (EM&A) Summary Report for the Service Contract to summarized monitoring results and inspection findings during the period from 1

 June to 31 August 2025 (the Reporting Period).
- 9.1.2 In the Reporting Period, no construction noise limit level exceedance during daytime and restricted hours was recorded. Since no construction works were carried out during restricted hours, no additional weekly noise monitoring during restricted hours was performed in the reporting period. No noise complaint (which is an Action Level exceedance) was received by the ER, EPD and the Contractors.
- 9.1.3 During the Reporting Period, weekly joint site inspections were undertaken to evaluate the site environmental performance. No non-compliances were observed during the weekly site inspection and environmental audit of the Reporting Period. Minor deficiencies found in the weekly site inspection were in general rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.
- 9.1.4 No notification of summons or successful prosecution was received under the Project. However one (1) environmental complaint regarding odour nuisance was received in the Reporting Period. Upon received the complaint, site inspection with the Project site boundary was carried out by the Contractor and no abnormal odour was identified. Moreover, no odour was perceived during the site visit at the nearby village houses. Regularly monthly odour patrol by independent party was carried out on 11 August 2025 and no level 2 odour intensity was identified. Ad-hoc odour patrol by independent party for the Project was carried out on 15 August 2025 and a moderate odour was detected. No level 2 odour intensity was detected in the subsequent patrol on the same day. The investigation revealed that the complaint was considered unlikely due to the Project.


9.2 RECOMMENDATIONS

- 9.2.1 Construction noise should be a key environmental impact during the works. The noise mitigation measures such as use of quiet plants or temporary noise barrier installation at the construction noise predominated area should be implemented in accordance with the EM&A requirement and the latest CNP.
- 9.2.2 In addition, all effluent discharge shall be ensured to fulfill the discharge license stipulation.
- 9.2.3 All the trees proposed to be retained in-situ should be properly preserved and protected during the construction works. Tree Preservation and Protection Works for these retained trees shall follow Section 3 and 26 of CEDD's General Specification for Engineering Works and Section 26 of Contract Specification Part B.
- 9.2.4 Trees to be felled shall be in accordance with the Tree Preservation and Removal Proposal (TPRP) to be approved by relevant approval authority. The tree removal work shall only commence after such approval has been granted.
- 9.2.5 Contract Specification Part B Section 1.78 "Waste Management" and DEVB's "Guidelines on Yard Waste Reduction and Treatment" should be referred before tree removal and plan the necessary arrangement.



Appendix A

Layout plan of the Project

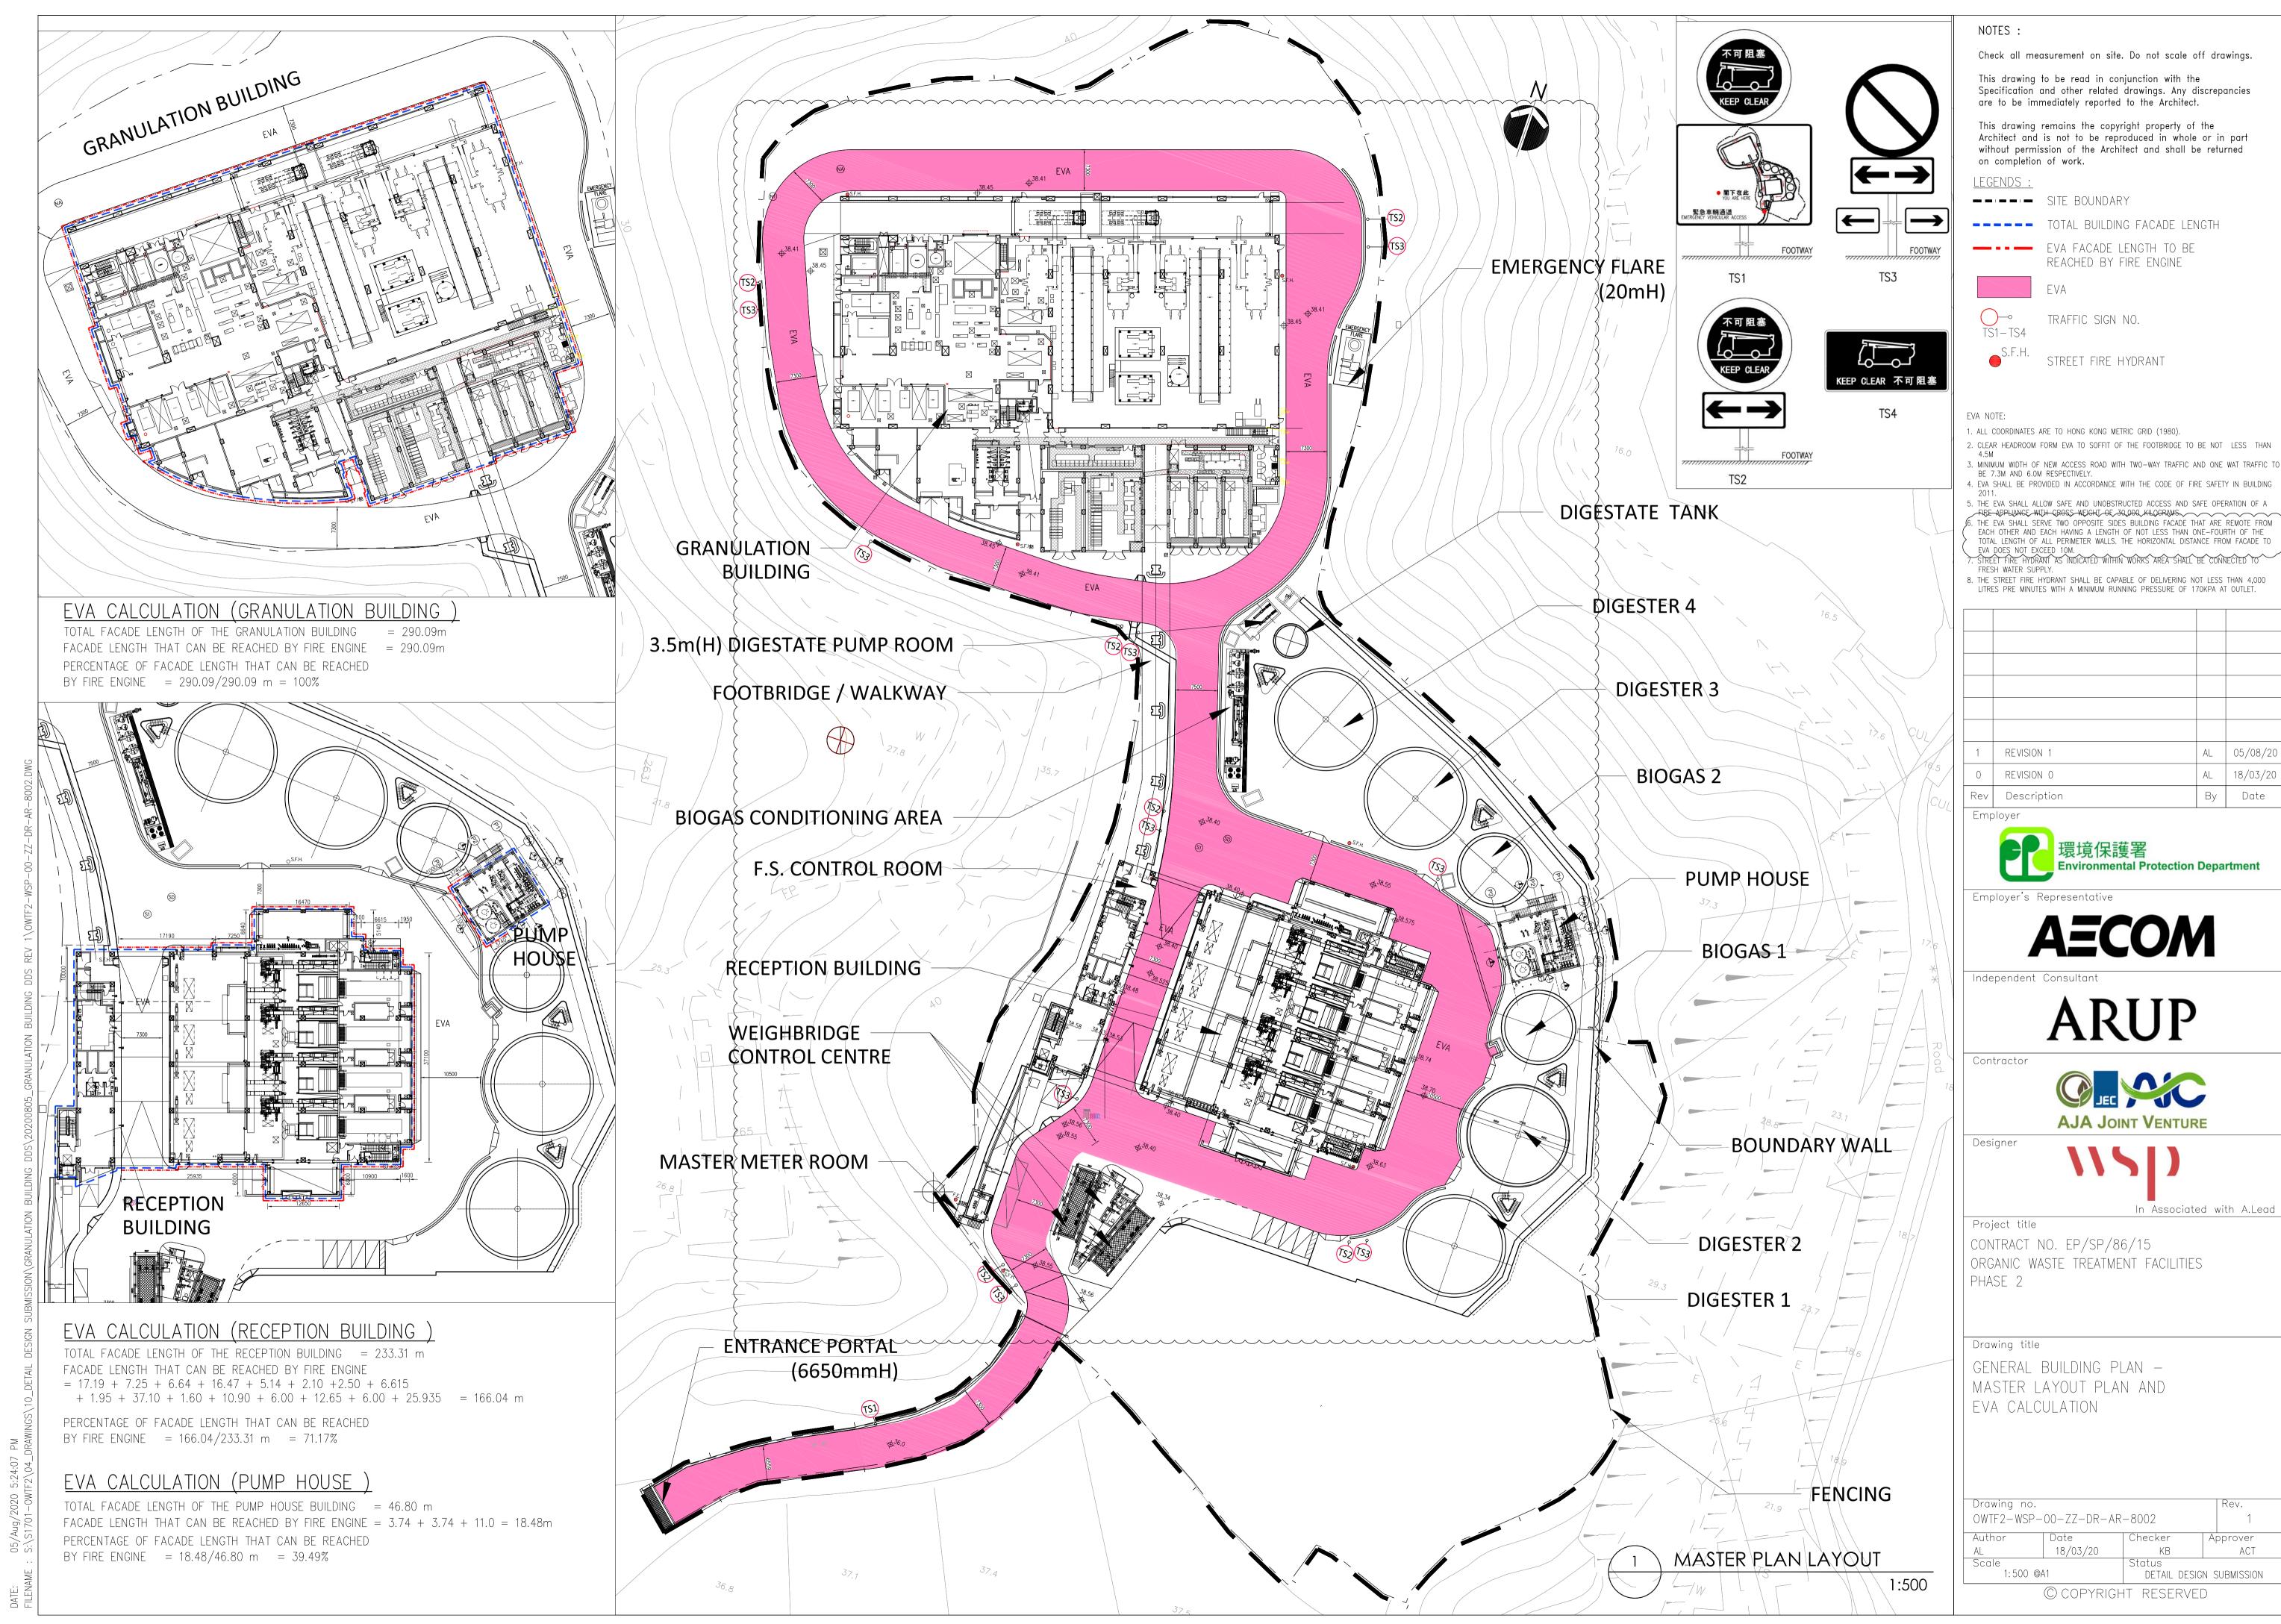




Appendix B

Organization Chart



Project Organization Chart

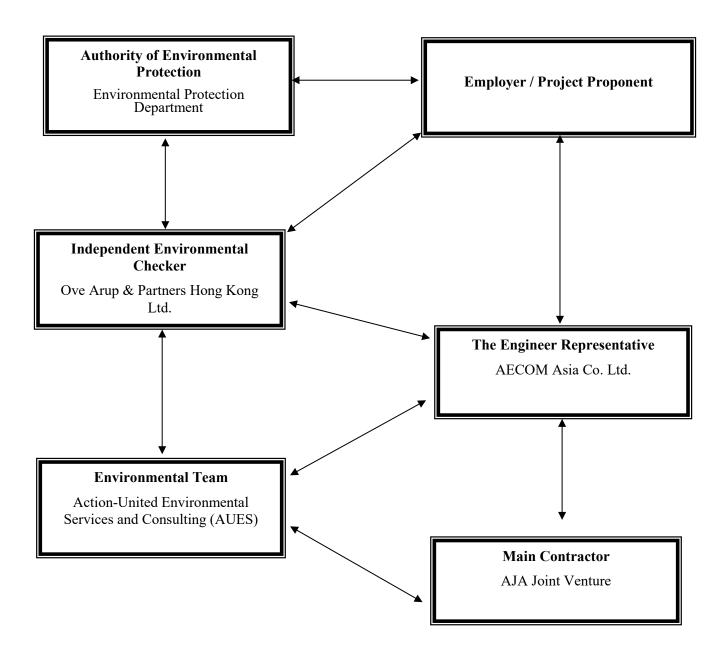



Contact Details of Key Personnel for the Project

Organization	Project Role	Name of Key Staff	Tel No.	Fax No.
EPD	Project Proponent	Sunny Chiu	3151 7209	3528 0492
AECOM	Resident Engineer	Terrence Lam	5579 5239	3010 8507
AECOM	Resident Engineer	Ivan Yung	5723 7750	3010 8507
ARUP	Independent Environmental Checker	Ricky Chui	2268 3437	2268 3380
ARUP	Engineer (Safety, Environment and Planning)	Roy Ng	2268 3588	2268 3588
AJAJV	Project Manager	Victor Wu	2862 5013	2862 5013
AJAJV	Construction Manager	Ethan Wong	9805 7325	9805 7325
AJAJV	Project Environmental Manager	Samuel Tsui	9455 5865	9455 5865
AJAJV	Environmental Officer	Harry Lam	9353 6141	9353 6141
AUES	Environmental Team Leader	T. W. Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Nicola Hon	2959 6059	2959 6079
AUES	Environmental Consultant	Ben Tam	2959 6059	2959 6079
AUES	Environmental Consultant	Martin Li	2959 6059	2959 6079

Legend:

EPD (Employer) – Environmental Protection Department

AECOM (Project Consultant) – AECOM Asia Co. Ltd.

AJAJV (Main Contractor) – AJA Joint Venture


ARUP (IEC) – Ove Arup & Partners Hong Kong Ltd.

AUES (ET) – Action-United Environmental Services & Consulting



Appendix C

Monitoring Locations for Impact Monitoring

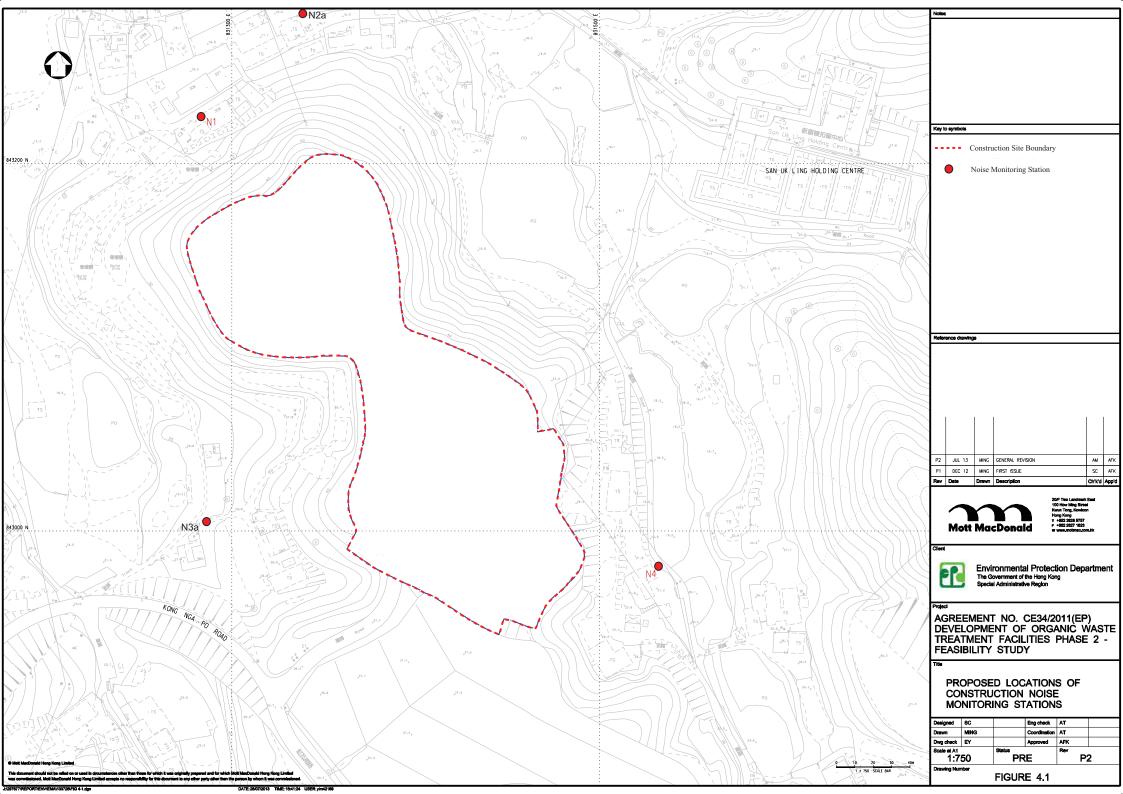



Appendix D

Remaining Rolling Construction Programme

Construction Programme (Mar 2025 to Jun 2025)

Construction Activities		2025			
Construction Activities		Apr	May	Jun	
Reception Building					
- Painting works					
- Soft Landscape works					
- Testing and Commissioning works					
Granulation Building					
- Signatures Installation works					
- Testing and Commissioning works			<u> </u>		
AD Tank					
- External Cladding Installation works					

Construction Programme (Jul 2025 to Oct 2025)

Construction Activities		2025					
Construction Activities	Jul	Aug	Sep	Oct			
Reception Building							
- Painting works							
- Testing and Commissioning works							
Granulation Building							
- Signatures Installation works							
- Testing and Commissioning works							
AD Tank							
- External Cladding Installation works							





Appendix E

Graphical Plots of Monitoring Results





Construction Noise

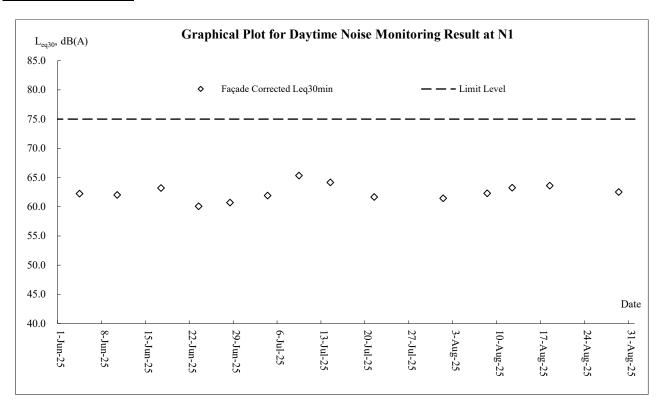

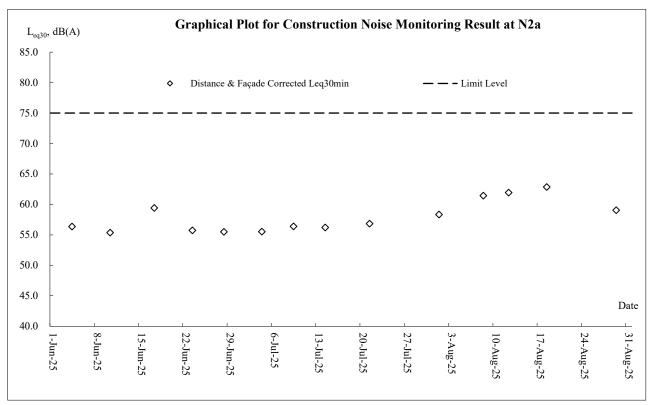



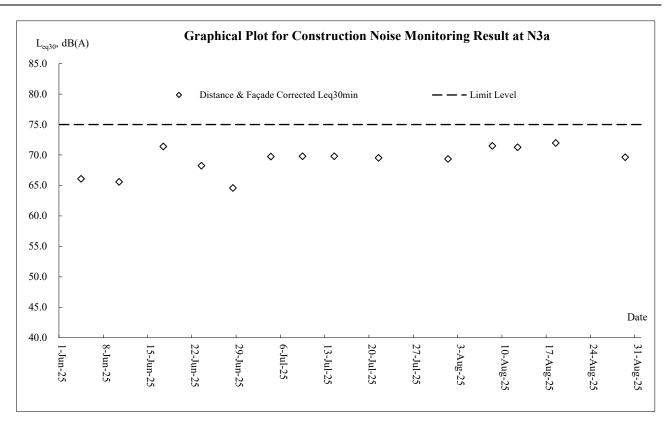

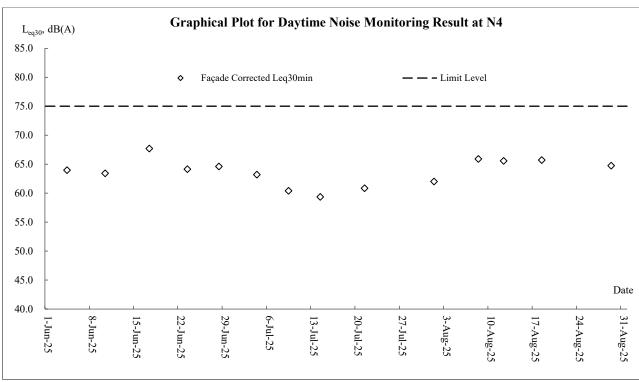



Appendix F

Meteorological Information



The weather of June 2025

The weather of June 2025 was hotter and drier than usual in Hong Kong, mainly attributing to the stronger subtropical ridge covering southeastern China. The monthly mean minimum temperature of 27.1 degrees was 0.6 degrees above the normal and one of the fifth highest on record for June. The monthly mean maximum temperature of 31.5 degrees and monthly mean temperature of 28.9 degrees were 0.8 degrees and 0.6 degrees above their corresponding normals and both were one of the seventh on record for June. The total rainfall in the month was 237.3 millimetres, about 48 percent of the normal of 491.5 millimetres. With all six months drier than usual, the accumulated rainfall recorded in the first half of the year was only 444.4 millimetres, about 41 percent of the normal of 1082.5 millimetres for the same period and the fifth lowest on record for the same period

The weather of July 2025

After a very dry first half of the year, more significant rainfall eventually returned to Hong Kong in July 2025, mainly due to the passage of the remnant of tropical cyclone Danas in early July and typhoon Wipha in mid-July, as well as showery activities associated with troughs of low pressure and active southwesterly airstreams in the month. Also, the strike of Wipha necessitated the issuance of the Hurricane Signal No. 10 on 20 July. The monthly rainfall was 601.7 millimetres, about 56 percent above the normal of 385.8 millimetres. However, with the well below normal rainfall in the first half of the year, the accumulated rainfall recorded in the first seven months of the year was only 1046.1 millimetres, still a deficit of 29 percent compared to the normal of 1468.2 millimetres for the same period. The month was also warmer than usual with the monthly mean maximum temperature of 32.4 degrees, 0.8 degrees above the normal and one of the ninth highest on record for July. The monthly mean temperature of 29.5 degrees and monthly mean minimum temperature of 27.4 degrees were 0.6 degrees and 0.5 degrees above their respective normals.

The weather of August 2025

Mainly attributing to the heavy rain associated with an active southwest monsoon and upper-air disturbances in early August, and a number of tropical cyclones in mid-August, the month was much wetter than usual. The monthly rainfall recorded at the Hong Kong Observatory was 939.2 millimetres, more than double the August normal of 453.2 millimetres, and the third highest on record for August. Although the first half of the year was much drier than usual, with outbreaks of heavy rain in July and August, the accumulated rainfall in the first eight months of the year was 1985.3 millimetres, catching up the normal value of 1921.5 millimetres for the same period. The month was also much cloudier than usual. The mean amount of cloud in the month was 81 percent, 11 percent above the normal of 70 percent, one of the fourth highest on record for August. While the monthly mean temperature of 29.0 degrees was only 0.3 degrees above the normal, together with the higher than normal temperatures in June and July, the summer of this year from June to August was hotter than normal. The mean minimum temperature of 27.2 degrees, the mean maximum temperature of 31.9 degrees and the mean temperature of 29.1 degrees were respectively one of the sixth, one of the seventh and one of the ninth highest on record for the same period.



Appendix G

Waste Flow Table

Name of Department : EPD Contract No: EP/SP/86/15

Monthly Summary Waste Flow Table for 2025

Version: 0

	Actual Quantities of Inert C&D Materials Generated Monthly					Actual Quantity of C&D Wastes Generated Monthly					
Month	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects (see Note 10)	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging (see Notes 4)	Plastics (see Notes 2 &4)	Chemical Waste	Others, eg. general refuse
	(in '000m3)	(in '000m3)	(in '000m3)	(in '000m3)	(in '000m3)	(in '000m3)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000m3)
sub-total up to 2024	102.399	0.000	0.000	83.508	18.658	0.233	337.486	1.500	0.700	0.000	5.660
Jan-25	0.334	0.000	0.000	0.000	0.334	0.000	0.000	0.000	0.000	0.000	0.027
Feb-25	0.152	0.000	0.000	0.000	0.152	0.000	0.000	0.000	0.000	0.000	0.021
Mar-25	0.027	0.000	0.000	0.000	0.027	0.000	0.000	0.000	0.000	0.000	0.023
Apr-25	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
May-25	0.017	0.000	0.000	0.000	0.017	0.000	0.000	0.000	0.000	0.000	0.010
Jun-25	0.006	0.000	0.000	0.000	0.006	0.000	0.000	0.000	0.000	0.000	0.024
Sub total (since 2019)	102.935	0.000	0.000	83.508	19.194	0.233	337.486	1.500	0.700	0.000	5.765
Jul-25	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.003
Aug-25	0.004	0.000	0.000	0.000	0.004	0.000	0.000	0.000	0.000	0.000	0.005
Sep-25											
Oct-25											
Nov-25											
Dec-25											
Total (since 2019)	102.940	0.000	0.000	83.508	19.199	0.233	337.486	1.500	0.700	0.000	5.773

Note 1	The waste flow table shall also include C&D materials that are not specified in the Contract to be imported for use at the Site
2	Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material
3	The Contractor shall also submit the latest forecast of the amount of C&D materials expected to be generated from the Works, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the Works is equal to or exceeding 50,000m3.
4	All recyclable materials, including metals, paper / cardboard packaging, plastics, etc. will be collected by registered collector for recycling.
5	Conversion factors for reporting purpose:
	in-situ: rock = 2.5 tonnes/m ³ ; soil = 2.0 tonnes/m ³
	excavated: rock = 2.0 tonnes/m ³ ; soil = 1.8 tonnes/m ³ ; broken concrete and bitumen = 2.4 tonnes/m ³
	C&D Waste (including tree waste) = 0.9 tonnes/m^3 ; bentonite slurry = 2.8 tonnes/m^3
6	Numbers are rounded off to the nearest three decimal places
7	The "Total Quantity Generated" equals to the sum of "Reuse in the Contract", "Reuse in Other Projects" and "Disposed as Public Fill"
8	The "Hard Rock and Large Broken Concrete" were disposed as public fill
9	The amount in "Disposed as Public Fill" includes the "Hard Rock and Large Broken Concrete" disposed as public fill
10	The "Reused in other projects" include C&D inert material and hard rock and large broken concrete



Appendix H

Environmental Mitigation Implementation Schedule (Extracted from EM&A Manual)



					Impl	ementa	ation S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
Air Qual	ity Impact (Construction)								
3.8.1.1	2.4	General Dust Control Measures Dust emissions could be suppressed by regular water spraying on site. In general, water spraying twice a day could reduce dust emission from active construction area by 50%. However, for the Project more frequent water spraying is proposed. Watering eight times per day, or once every 1.5 hours, is suggested at all active works areas in order to achieve a higher dust suppression efficiency of 87.5%.	Within construction site / Duration of the construction phase	Contractor		✓ 			EIA Recommendation and Air Pollution Control (Construction Dust) Regulation	V
3.8.1.2	2.4	Best Practice For Dust Control	Within construction site /	Contractor		√	•	•	EIA	V
		The relevant best practices for dust control as stipulated in the Air Pollution Control (construction Dust) Regulation should be adopted to further reduce the construction dust impacts of the Project. These best practices include: Good Site Management	Duration of the construction phase						Recommendation and Air Pollution Control (Construction Dust) Regulation	
		Good site management is important to help reducing potential air quality impact down to an acceptable level. As a general guide, the Contractor should maintain a high standard of housekeeping to prevent emissions of fugitive dust. Loading, unloading, handling and storage of raw materials, wastes or by-products should be carried out in a manner so as to minimise the release of visible dust emission. Any piles of materials accumulated on or around the work areas should be cleaned up regularly. Cleaning, repair and maintenance of all plant facilities within the work areas should be carried out in a manner minimising generation of fugitive dust emissions. The material should be handled properly to prevent fugitive dust emission before cleaning.								
		Disturbed Parts of the Roads Each and every main temporary access should be paved with concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials; or								
		 Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road 								
Legend:	V = imple	emented; x = not implemented; @ = partially implemented	d; * = pending to be imp	elemented; $N/A = r$	not appli	cable				



	<u> </u>	,							·	
					lmp	lementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
	•	surface wet.	•	•	•	•				
		Exposed Earth								
		 Exposed earth should be properly treated by compaction, hydroseeding, vegetation planting or seating with latex, vinyl, bitumen within six months after the last construction activity on the site or part of the site where the exposed earth lies. 								
		Loading, Unloading or Transfer of Dusty Materials								
		 All dusty materials should be sprayed with water immediately prior to any loading or transfer operation so as to keep the dusty material wet. 								
		Debris Handling								
		 Any debris should be covered entirely by impervious sheeting or stored in a debris collection area sheltered on the top and the three sides. 								
		 Before debris is dumped into a chute, water should be sprayed so that it remains wet when it is dumped. 								
		Transport of Dusty Materials								
		 Vehicle used for transporting dusty materials/spoils should be covered with tarpaulin or similar material. The cover should extend over the edges of the sides and tailboards. 								
		Wheel washing								
		Vehicle wheel washing facilities should be provided at each construction site exit. Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels.								
		Use of vehicles								
		The speed of the trucks within the site should be controlled to about 10km/hour in order to reduce adverse dust impacts and secure the safe movement around the site.								
		Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels.								
		 Where a vehicle leaving the construction site is carrying a load of dusty materials, the load should be covered entirely 								

Legend: V = implemented; x = not implemented; a = partially implemented; x = pending to be implemented; x = not implemented;



					Impl	ementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
		by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle.		•					•	
		Site hoarding								
		Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit.								
Air Qua	lity Impact	(Operation)								
3.8.2	2.3	Odour patrol at site boundary of the Project	Site boundary / During operation stage (the need to continue the odour patrol after the end of the 2-year monitoring period would depend on the monitoring results and should be agreed with EPD)	OWTF Operator	✓	•	√		EIAO-TM	NA
3.8.2	2.4	Install gas cleaning equipment and stack on the CHP and odour treatment unit	CHP and odour treatment unit	Design Consultant / OWTF Operator	✓		✓		EIA Recommendation	NA
		■ The preliminary design suggests the use of a two stage process involving either a biofilter or Ultraviolet Light (UV-C) together with ozone treatment as the first stage, and an activated carbon filter as the second stage for the odour treatment unit. It is recommended to install the UV-C and ozone treatment system with second stage active carbon filters as this has a lower footprint requirement than the biofilter option. However, the actual unit installed depends on the final design by the contractor in the design phase.								
		 The preliminary design incorporates a combination of thermal and catalytic treatment processes to remove pollutants from the exhaust gasses from the CHP. 								
		 Both the odour treatment unit and the CHP emissions are suggested to be directed to a flue to aid the dispersion and minimise effects on ASRs. 								
Hammer	Dick Acces	sment (Operation)		·						



		·		·	lmp	lementa	ation S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
4.9	3.2	The HA has assumed that the following "Good Practices" and "recommended design measures" for the safe operation of OWTF 2 shall be carried out as far as reasonably practicable: The process plant building will be provided with adequate	During design and operation phases	Design Consultant / OWTF Operator	√		√		EIAO & EIAO TM Annex 4	NA
		number of gas detectors distributed over the various areas of potential leak sources to provide adequate coverage.								
		 All electrical equipment inside the building will be classified in accordance with the electrical area classification requirements. No unclassified electrical equipment will be used during operations or maintenance. 								
		Reference can be made to Codes of Practice and guidance issued in Europe that applies to places where explosive atmospheres may occur (called 'ATEX' requirements). These are covered as part of the European Directive: the Explosive Atmospheres Directive (99/92/EC) and the UK regulations, Dangerous Substances and Explosive Atmospheres Regulations 2002 (DSEAR). Where potentially explosive atmospheres may occur in the workplace, the requirements include, identifying and classifying (zoning) areas where potentially explosive atmospheres may occur; avoiding ignition sources in zoned areas, in particular those from electrical and mechanical equipment; where necessary, identifying the entrances to zoned areas; providing appropriate anti-static clothing for employees; and before they come into operation, verifying the overall explosion protection safety of areas where explosive atmospheres may occur.								
		 All safety valves design shall take into account discharging any released fluid to a safe location, or stopping misdirection of fluid flows in order to avoid hazardous outcome. 								
		 Safety markings and crash barriers will be provided to the aboveground piping, digesters and the gas holder near the entrance. 								
		 Lightning protection installations will be installed following IEC 62305, BS EN 62305, AS/NZS 1768, NFPA 780 or equivalent standards. 								
										_

Legend: V = implemented; x = not implemented; @ = partially implemented; * = pending to be implemented; N/A = not applicable



					Imple	ementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
		provided in the vicinity of the digester tanks, gasholders and gas purification equipment to protect the equipment against external fires, and to provide some protection to external areas from the effects of fire/explosion.	•	•	•			•		
		Suitable fire extinguishers will be provided within the site. An External Water Spray System (EWSS) will be installed in appropriate areas, such as around the gasholders, gas purification, desulphurisation units, and digester areas. The facilities will also be equipped with fire and gas detection system and fire suppression system. Stringent procedures are implemented to prohibit smoking or naked flames to be used on-site.								
		 Fixed crash barriers will be provided in areas where process equipment is adjacent to the internal roadway to protect against vehicle collision. Adequate warning signage and lighting will also be provided and maximum speed limit will 								
		also be in place.								
Noise In	npact (Cons	struction)								
	npact (Cons 4.2.7	·	Within construction site / During construction phase	Contractor		√			EIAO, EIAO-TM and Noise Control Ordinance	V
Noise In 5.9.1	• •	Good Site Practice Good site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during	During construction	Contractor		✓			and Noise Control	V
	• •	Good Site Practice Good site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during each phase of construction: only well-maintained plant to be operated on-site and plant	During construction	Contractor		√			and Noise Control	V
	• •	Good Site Practice Good Site Practice Good site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during each phase of construction: only well-maintained plant to be operated on-site and plant should be serviced regularly during the construction works; machines and plant that may be in intermittent use to be shut down between work periods or should be throttled down to a	During construction	Contractor		√			and Noise Control	V
	• •	Good Site Practice Good Site Practice Good Site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during each phase of construction: only well-maintained plant to be operated on-site and plant should be serviced regularly during the construction works; machines and plant that may be in intermittent use to be shut down between work periods or should be throttled down to a minimum; plant known to emit noise strongly in one direction, should, where possible, be orientated to direct noise away from the	During construction	Contractor		✓			and Noise Control	V



					Impl	ementa	ation S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Impleme Status
		construction activities.	•	•	•					
5.9.1	4.2.7	Selection of Quieter PME The recommended quieter PME adopted in the assessment were taken from the EPD's QPME Inventory and British Standard, namely Noise Control on Construction and Open Sites, BS 5228: Part 1: 2009. It should be noted that the silenced PME selected for assessment can be found in Hong Kong.	Within construction site / During construction phase	Contractor		✓			EIAO, EIAO-TM and Noise Control Ordinance	V
5.9.1	4.2.7	Use of Movable Noise Barriers Movable noise barriers can be very effective in screening noise from particular items of plant when constructing the Project. Noise barriers located along the active works area close to the noise generating component of a PME could produce at least 10 dB(A) screening for stationary plant and 5 dB(A) for mobile plant provided the direct line of sight between the PME and the NSRs is blocked.	Within construction site / During construction phase	Contractor		✓			EIAO, EIAO-TM and Noise Control Ordinance	V
5.9.1	4.2.7	Use of Noise Enclosure/ Acoustic Shed The use of noise enclosure or acoustic shed is to cover stationary PME such as air compressor and generator. With the adoption of the noise enclosure, the PME could be completely screened, and noise reduction of 15 dB(A) can be achieved according to the EIAO Guidance Note No.9/2010.	Within construction site / During construction phase	Contractor		✓			EIAO, EIAO-TM and Noise Control Ordinance	V V
5.9.1	4.2.7	Use of Noise Insulating Fabric Noise insulating fabric can also be adopted for certain PME (e.g. pilling machine etc). The fabric should be lapped such that there are no openings or gaps on the joints. According to the approved Tsim Sha Tsui Station Northern Subway EIA report (AEIAR-127/2008), a noise reduction of 10 dB(A) can be achieved for the PME lapped with the noise insulating fabric.	Within construction site / During construction phase	Contractor		√			EIAO, EIAO-TM and Noise Control Ordinance	V
loise Ir	npact (Oper	ation)								NA
.9.2	4.2.7	Fixed Plant Noise	Within construction site /	Design Consultant	✓		✓		EIAO, EIAO-TM	INA
		Specification of the maximum allowable sound power levels of the proposed fixed plants should be followed. The following noise reduction measures should be considered as far as practicable during operation:	During operation phase / Throughout operation phase	/ Contractor					and Noise Control Ordinance	
		 Choose quieter plant such as those which have been effectively silenced; 								

Z:\Jobs\2019\TCS01062(EP_SP_86_15)\600\Report Submission\Quarterly Report\23rd Jun 25 - Aug 25\R0483v2.docx



				Impl	lementa	tion S	tage ¹		
EIA EM&A Ref. Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implem Statu
•	 Include noise levels specification when ordering new plant (including chillier and E/M equipment); 	•	•				•		
	 Locate fixed plant/louver away from any NSRs as far as practicable; 								
	 Locate fixed plant in walled plant rooms or in specially designed enclosures; 								
	 Locate noisy machines in a completely separate building; 								
	 Install direct noise mitigation measures including silencers, acoustic louvers and acoustic enclosure where necessary; and 								
	 Develop and implement a regularly scheduled plant maintenance programme so that equipment is properly operated and serviced in order to maintain a controlled level of noise. 								
Vater Quality Im	pact (Construction)								
8.1.1 5.3	Construction site runoff	Within construction site /	Contractor		\checkmark			ProPECC Note	V
	The site practices outlined in ProPECC Note PN 1/94 should be followed as far as practicable in order to minimise surface runoff and the chance of erosion. The following measures are recommended to protect water quality and sensitive uses of the coastal area, and when properly implemented should be sufficient to adequately control site discharges so as to avoid water quality impacts:	Duration of the construction phase						PN 1/94	
	At the start of site establishment, perimeter cut-off drains to direct off-site water around the site should be constructed with internal drainage works and erosion and sedimentation control facilities implemented. Channels, earth bunds or sand bag barriers should be provided on site to direct storm water to silt removal facilities. The design of the temporary on-site drainage system should be undertaken by the Contractor prior to the commencement of construction;								
	 Sand/silt removal facilities such as sand/silt traps and sediment basins should be provided to remove sand/silt particles from runoff to meet the requirements of the TM standards under the WPCO. The design of efficient silt 								



					leant		on Ctonol		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	on Stage ¹ Op De	Relevant Legislation & Guidelines	Implemen Status
		removal facilities should be based on the guidelines in Appendix A1 of ProPECC Note PN 1/94. Sizes may vary depending upon the flow rate. The detailed design of the sand/silt traps should be undertaken by the Contractors prior to the commencement of construction.							
		All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit should be regularly removed, at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times.							
		Measures should be taken to minimize the ingress of site drainage into excavations. If excavation of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from foundation excavations should be discharged into storm drains via silt removal facilities.							
		All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facility should be provided at construction site exit where practicable. Wash-water should have sand and silt settled out and removed regularly to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains.							
		 Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system. 							
		 Manholes (including newly constructed ones) should be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and stormwater runoff being directed into 							

Z:\Jobs\2019\TCS01062(EP_SP_86_15)\600\Report Submission\Quarterly Report\23rd Jun 25 - Aug 25\R0483v2.docx



					Imple	menta	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
		foul sewers.	•				•	•		
		Precautions should be taken at any time of the year when rainstorms are likely. Actions should be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarized in Appendix A2 of ProPECC Note PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes.								
		Bentonite slurries used in piling or slurry walling should be reconditioned and reused wherever practicable. Temporary enclosed storage locations should be provided on-site for any unused bentonite that needs to be transported away after all the related construction activities are completed. The requirements in ProPECC Note PN 1/94 should be adhered to in the handling and disposal of bentonite slurries.								
6.8.1.2	5.3	General construction activities	Within construction site /	Contractor		✓			ProPECC Note	V
		Construction solid waste, debris and refuse generated on-site should be collected, handled and disposed of properly to avoid entering any nearby storm water drain. Stockpiles of cement and other construction materials should be kept covered when not being used.	During construction phase						PN 1/94	
6.8.1.3	5.3	Excavation works	Within construction site /	Contractor		✓			ProPECC Note	NA
		The construction programme should be properly planned to minimise excavation works during the wet season (April to September), temporarily exposed slope/soil surfaces should be covered by a tarpaulin or other means, as far as practicable. Interception channels should be provided (e.g. along the crest/edge of the excavation) to prevent storm runoff from washing across exposed soil surfaces. Arrangements should be in place to ensure that adequate surface protection measures can be safely carried out well before the arrival of a rainstorm. Other measures that need to be implemented before, during and after rainstorms are summarized in ProPECC PN 1/94.	During construction phase						PN 1/94	· V
6.8.1.4	5.3	Accidental spillage The Contractor should register as a chemical waste producer	Within construction site / During construction phase	Contractor		✓			ProPECC Note PN 1/94 and <u>Wast</u> e Disposal	V
Legend: V	V = impler	mented; x = not implemented; @ = partially implemented;	* = pending to be imple	emented; $N/A = not$	applical	ble				-



			Implementation Stage ¹							
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
		if chemical wastes are produced from construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General) Regulation should be observed and complied with for control of chemical wastes.			•				Ordinance	
		 Maintenance of vehicles and equipment, involving activities with potential for leakage and spillage, should only be undertaken within areas appropriately equipped to control these discharges. 								
		Oils and fuels should only be stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to any nearby storm water drain, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund should be drained of rainwater after a rain event.								
		Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:								
		 Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport. 								
		 Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents. 								
		 Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area. 								
6.8.1.5	5.3	Sewage effluent from construction workforce	Within construction site /	Contractor		✓			ProPECC Note	V
		Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor should be employed to provide appropriate and adequate portable toilets and be	During construction phase						PN 1/94	
Legend: \	V = imple	emented; $x = \text{not implemented}$; @ = partially implemented	* = pending to be imple	emented; $N/A = nc$	ot applic	able				



					Impl	ementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Impleme Status
		responsible for appropriate disposal and maintenance.	•	•	•	•	•	•		
Water Q	uality Impa	ct (Operation)	•	•	•	•		•	•	
6.8.2.1	5.3	Sewage effluent and sewerage impact	Within construction site /	Design Consultant	✓		✓		EIA	NA
		In order to minimise the risk of exceeding capacity of the sewerage system, on-site underground storage of effluent is recommended for the OWTF 2, with a capacity of 6 hours of peak flow. Using the values presented in the preliminary design, the on-site storage required to buffer excess capacity would be equivalent to 30 m ³ . A below ground effluent retention tank would function to store effluent produced during peak periods when usage of the Sha Ling pumping station is high. Effluent stored during such periods could then be pumped out of the retention tank and discharged into the public sewer during off-peak times when capacity is sufficient.	During design and operation phase	/ OWTF Operator					recommendations	
6.8.2.2	5.3	Wastewater generation from organic waste treatment processes	Within construction site / During design and	Design Consultant / OWTF Operator	✓	•	✓		TM-DSS, Water Pollution Control	NA
		Wastewater must be collected and diverted to the wastewater treatment plant (WWTP).	operation phase						Ordinance	
		An adequately sized WWTP with technologies such as membrane bioreactor, reverse osmosis or multi-phase separation process or system should be provided for the OWTF 2. Polluting parameters in the effluent should be in compliance with the requirements as specified in the TM-DSS.								
		Leachate from the waste reception and composting process								
		 A drainage system will be provided at the reception area connecting to the proposed onsite WWTP. The leachate would be treated in the WWTP and there would be no direct discharge of leachate. 								
		Dewatering of the digestate from the separators								
		The wastewater generated from the dewatering of digestate from the digesters is expected to be around 229.18 m³/day and a peak flow of 5.31L/s. The on-site WWTP will deploy suitable treatment process in order to reduce the pollution level to an acceptable standard. The effluent shall be treated according to the TM-DSS standard before discharging to foul sewers.								



					Impl	lementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
		Condensate from biogas drying, odour treatment and ventilation system			•		•			
		 Condensate from biogas handling and wastewater from the odour treatment process would be collected and transferred to the WWTP. There is no direct discharge of wastewater to the sewer. 								
		Washing of waste delivery trucks								
		 Surplus wastewater generated from the vehicle washing facilities would be collected and transferred to the WWTP for further treatment before discharging to the foul sewer. 								
		Untreated wastewater from wastewater treatment plant								
		 Maintenance of the WWTP and its connection pipe work would be conducted regularly to confirm the condition of the holding tank and pipes. This will ensure early detection of any damage for repair or replacement. 								
		Leakage of materials from WWTP								
		 Regular scheduled maintenance of the WWTP will be carried out to confirm the condition of the facility and detect any damages at an early stage for repair or replacement. 								
6.8.2.3	5.3	Contaminated stormwater runoff and accidental spillages	Within construction site /	OWTF Operator			✓		TM-DSS; Water	NA
		Regular maintenance of plant facilities, as recommended in Section 6.8.2.2 of the EIA report, will be performed to confirm the condition of plant facilities and detect any damage for repair or replacement. Training should be provided to the employees on handling accidental spillage, so that in such cases, actions can be carried out quickly to avoid runoff to nearby streams/drains.	During operation phase / Throughout operation phase			_			Pollution Control Ordinance	
Waste Ma	anagemen	t Implications (Construction)								
7.6.1.1	6.3	Good Site Practices	Project construction site /	Contractor		✓			Waste Disposal	V
		Recommendations for good site practices during the construction activities include:	Throughout construction stage / Until completion of all construction						Ordinance; Regulation and	
		 Obtain the relevant waste disposal permits from appropriate authorities, in accordance with the Waste Disposal Ordinance (Cap. 354) and subsidiary Regulations and the Land (Miscellaneous Provisions) Ordinance (Cap. 28); 	activities						the Land (Miscellaneous Provisions) Ordinance;	
Legend:	V = imple	emented; x = not implemented; @ = partially implemented	; * = pending to be imple	emented; $N/A = nc$	ot applic	able				



					Impl	ementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
		 Provide staff training for proper waste management and chemical handling procedures; Provide sufficient waste disposal points and regular waste collection; Provide appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers; Carry out regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors; Separate chemical wastes for special handling and disposal to licensed facilities for treatment; and Employ licensed waste collectors to collect waste. 							Waste Disposal (Chemical Wastes) (General) Regulation; Technical Circular (Works) No. 19/2005 Environmental Management on Construction Site	
7.6.1.2	6.3	Waste Reduction Measures Recommendations to achieve waste reduction include: Design foundation works to minimise the amount of excavated material to be generated; Provide training on the importance of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling; Sort demolition debris and excavated materials from demolition works to recover reusable/recyclable portions Segregation and storage of different types of waste in different containers or skips to enhance reuse or recycling of materials and their proper disposal Encourage collection of recyclable waste such as waste paper and aluminium cans by providing separate labelled bins to enable such waste to be segregated from other general refuse generated by the work force Plan the use of construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste	Project construction site / Throughout construction stage / Until completion of all construction activities	Contractor	✓	✓			Waste Disposal Ordinance	V
7.6.1.3	6.3	Excavated and C&D Materials In order to minimise impacts resulting from collection and transportation of C&D material for off-site disposal, the	Project construction site / Throughout construction stage / Until completion	Contractor	✓	✓			Waste Disposal Ordinance ; DEVB Technical	V



					Implementation Stage ¹					
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
		excavated materials should be reused on-site as fill material as backfilling material and for landscaping works far as practicable. Other mitigation requirements are: A Waste Management Plan (WMP), which becomes part of the Environmental Management Plan (EMP), should be prepared in accordance with ETWB TC(W) No.19/2005; A recording system for the amount of wastes generated, recycled and disposed of (including the disposal sites) should be adopted for easy tracking; and In order to monitor the disposal of excavated and non-inert C&D material at public filling facilities and landfills and to control fly-tipping, a trip-ticket system should be adopted (refer to PC/B TC(AN) No. (2010)).	of all construction activities						Circular (Works) No.6/2010 for Trip Ticket System for Disposal of Construction & Demolition Materials; Technical Circular (Works) No. 19/2005 Environmental Management on Construction Site	
7.6.1.4	6.3	(refer to DEVB TC(W) No. 6/2010). Chemical Waste Should chemical wastes be produced at the construction site, the Contractor would be required to register with EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste (such as explosive, flammable, oxidizing, irritant, toxic, harmful, or corrosive). The Contractor should employ a licensed collector to transport and dispose of the chemical wastes, to either the CWTC in Tsing Yi, or any other licensed facilities, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.	Project construction site / Throughout construction stage / Until completion of all construction activities	Contractor		✓			Code of Practice on the Packaging Labelling and Storage of Chemical Wastes; Waste Disposal (Chemical Waste) (General) Regulation	NA
7.6.1.5	6.3	General Refuse General refuse should be stored in enclosed bins or compaction units separated from excavated and non-inert C&D materials. A reputable waste collector should be employed by the Contractor to remove general refuse from the site, separately from inert C&D materials. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material.	Project construction site / Throughout construction stage / Until completion of all construction activities	Contractor		√			Waste Disposal Ordinance and Public Health and Municipal Services Ordinance - Public Cleansing and Prevention of Nuisances	V
Legend: \	V = imple	mented; x = not implemented; @ = partially implemented;	* = pending to be imple	emented; $N/A = no$	t applic	able				



					Imp	olement	ation S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
									Regulation	
Waste N	/lanagemen	t Implications (Operation)								
7.6.2.1	6.3	Good site practices	Construction site / On a	OWTF Operator			\checkmark		Waste Disposal	NA
		Adoption of the following good operational practices should be recommended to minimise waste management impacts:	Throughout operation stage						Ordinance; Waste Disposal	
		 Obtain the necessary waste disposal permits from the appropriate authorities, in accordance with the Waste Disposal Ordinance (Cap. 354), Waste Disposal (Chemical Waste) (General) Regulation and the Land (Miscellaneous Provision) Ordinance (Cap. 28); 	stage						(Chemical Waste) (General); Regulation and the Land (Miscellaneous	
	 Nomination of an approved person to be responsible for good site practice, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site; Use of a waste haulier licensed to collect specific category of 						Provision) Ordinance; DEVB Technical Circular (Works)			
		 Use of a waste haulier licensed to collect specific category of waste; 							No. 6/2010.	
		■ A trip-ticket system should be included as one of the contractual requirements and implemented by the Environmental Team to monitor the disposal of solid wastes at public filling facilities and landfills, and to control fly tipping. Reference should be made to DEVB TC(W) No. 6/2010.								
		 Training of site personnel in proper waste management and chemical waste handling procedures; 								
		 Separation of chemical wastes for special handling and appropriate treatment at a licensed facility; 								
		 Routine cleaning and maintenance programme for drainage systems, sumps and oil interceptors; 								
		 Provision of sufficient waste disposal points and regular collection for disposal; 								
		 Adoption of appropriate measures to minimise windblown litter and dust during transportation of waste, such as covering trucks or transporting wastes in enclosed containers; and, 								
		Implementation of a recording system for the amount of								_
Legend:	V = imple	emented; $x = not$ implemented; @ = partially implemented;	* = pending to be impl	lemented; $N/A = nc$	ot applic	cable				



					Impl	ementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
		wastes generated, recycled and disposed of (including the disposal sites).		•						
7.6.2.2	6.3	Waste reduction measures	Construction site / On a	OWTF Operator			✓		Waste Disposal	NA
		Adoption of the following good operational practices should be recommended to ensure waste reduction:	Throughout operation stage						Ordinance; Waste Disposal	
		 Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal; 							(Chemical Waste) (General); Regulation and	
		Encourage collection of aluminium cans, plastic bottles and packaging material (e.g. carton boxes) and office paper by individual collectors. Separate labelled bins should be provided to help segregate this waste from other general refuse generated by the work force; and							the Land (Miscellaneous Provision) Ordinance	
		 Any unused chemicals or those with remaining functional capacity should be reused as far as practicable. 								
7.6.2.3	6.3	Waste generated from pre-treatment process Wastes generated from pre-treatment process should be recycled as far as possible. Wastes generated from pre-treatment process should also be separated from any chemical waste and stored in covered skips. The recyclables should be collected by licensed collectors, while the rest of the waste should be removed from the site on a daily basis to minimise odour, pest and litter impacts. Open burning must be strictly prohibited.	Pre-treatment process / Throughout operation stage	OWTF Operator			✓		Waste Disposal (Chemical Waste) (General)	NA
7.6.2.4	6.3	Chemical Waste	Construction site	OWTF Operator			√		Code of Practice	NA
7.6.2.4		Chemical waste generated from machinery maintenance and servicing should be managed in accordance with the Code of Practice on the Packaging, Labelling and storage of Chemical Wastes under the provisions of Waste Disposal (Chemical Waste) (General) Regulation. The chemical waste should be collected by drum-type containers and, when transported off-site, removed by licensed chemical waste contractors. Alternatively, some of the chemical waste may be retained on-site for re-use by the Project in the manufacture of biogas or other products, subject to their composition being confirmed as suitable for such application.	Throughout operation stage	·					on the Packaging Labelling and Storage of Chemical Wastes; Waste Disposal (Chemical Waste) (General) Regulation	



					Impl	ementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implemen Status
		 Plant / equipment maintenance schedules should be planned in order to minimise the generation of chemical waste. 	•	•	•	•	•		•	
		 Non-recyclable chemical wastes and lubricants should be disposed of at appropriate facilities, such as CWTC. Copies or counterfoils from collection receipts issued by the licensed waste collector should be kept for recording purpose. 								
		 Recyclable chemical waste will be transported off-site for treatment by a licensed collector. The Contractor will need to register with EPD as a chemical waste producer. 								_
.6.2.5	6.3	General Refuse	Construction site / On a	OWTF Operator			✓		Waste Disposal	NA
		Waste generated in site offices should be reduced through segregation and collection of recyclables. To promote the recycling of wastes such as used paper, aluminium cans and plastic bottles, it is recommended that recycling bins should be clearly labelled and placed at locations with easy access. For the collection of recyclable materials, they should be collected by licensed collectors.	regular basis / Throughout operation stage						Ordinance	
		General refuse, other than segregated recyclable wastes, should be separated from any chemical waste and stored in covered skips. The general refuse should be removed from the site on a daily basis to minimise odour, pest and litter impacts. Also, open burning of refuse must be strictly prohibited.								_
cologic	al Impact (Construction)								- NA
3.7	7.3	For precautionary purposes and to further ensure that no wild flora species of conservation interest will be affected, prior to commencement of any construction works, it is recommended to conduct a detailed vegetation survey as baseline monitoring to update the exact locations, number and condition of individuals of <i>Aquilaria sinensis</i> and any other floral species of conservation interest within the Project Area. A Vegetation Survey Report summarizing the findings and recommendations of the detailed vegetation survey should be prepared and submitted to AFCD for approval no later than one month prior to commencement of construction works.	Before Project commencement	OWTF Operator	√				EIAO-TM	
	7.3	During construction phase, erection of a temporary protective	There is a second and the second	OWTF Operator		_			EIAO-TM	V



					Imp	lementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Impleme Status
		fence along the plantation area where trees and vegetation, including those of conservation concern identified under the detailed vegetation survey, would be retained within the Project Area is recommended for precautionary purposes to avoid any potential impact from construction activities such as vehicle movement and materials storage. Establishment of the protective fence could also raise the awareness of personnel to be present and protection of the plants. While the protective fence should be properly maintained, monitoring of individuals of Aquilaria sinensis and any other floral species of conservation interest identified in the detailed vegetation survey during construction phase on a monthly basis should be conducted to make sure that they are not affected by the construction works of the Project.	stage							
Ecologi	cal Impact (Operation)								
	•	No mitigation measure is required.			•					
Landsca	ape and Vis	ual Impact (Construction)								
Table 10.7 (CP1)	Table 8.1 (CP1)	Preservation of Existing Vegetation The development proposals would avoid disturbance to the existing trees as far as practicable within the confines of the development site. A preliminary tree survey has been undertaken to establish the existing resources. A tree survey review with formal tree removal application will be submitted to the relevant government departments for approval in accordance with ETWB TC(W) 03/2006 Tree Preservation, during the detailed design phase of the Project. Based on the preliminary findings it would be possible to retain 441 of the existing trees. If possible, all trees which are not in conflict with the proposals would be retained and shall be protected through the means of fencing, where appropriate, to prevent potential damage to tree canopies and root zones from vehicles and materials storage. Specifications for the protection of existing trees will be circulated to the relevant government authorities for approval together with the formal tree removal application.	Construction site / Throughout construction stage / Until completion of all construction activities	Contractor	✓	✓			Technical Circular (Works) No. 3/2006	V
Table 10.7 (CP2)	Table 8.1 (CP2)	Control of site construction activities Storage of materials should be carefully arranged to minimise potential landscape and visual impact.	Construction site / Throughout construction stage / Until completion	Contractor	✓	✓	•	•	EIAO-TM	V



					Imp	lementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Implement Status
	•	The location and appearance of site accommodation should be carefully designed to minimise potential landscape and visual impact.	of all construction activities				•		,	
		 Site lighting should be carefully designed to prevent light spillage, 								
		 Extent of the works area and construction period should be minimised as far as practicable. 								
		 Screen hoarding with compatible design to blend into the surrounding natural environmental should be considered. 								
		 Temporary works areas should be reinstated at the earliest possible opportunity. 			_					
Table	Table	Transplantation of existing trees	Throughout construction stage / Until completion of all construction activities	Contractor	✓	✓			Technical Circular	NA
10.7 (CP3)	8.1 (CP3)	Under current proposal, no tree is recommended to be transplanted since the trees in conflict with the proposed works are not suitable to be transplanted. However, should transplantation be proposed in the detailed design stage after an update tree survey, the recommended final recipient sites should be adjacent to their current locations. Enough time should be reserved for tree transplantation works to increase the survival rate of the transplanting trees. To ensure the survival of transplanted trees, protection work should be considered. The tree transplantation proposal will be submitted to relevant authorities for approval together with the formal tree removal application.							(Works) No. 3/2006	(No tree is recommended to be transplanted)
Landsca	ape and Vis	ual Impact (Operation)								37.4
Table 10.8 (OP1)	Table 8.2 (OP1)	Design of the Proposed OWTF OWTF will incorporate design features as part of design mitigation measures including	Construction site / During design stage	Design Consultant / OWTF Operator	✓				EIAO-TM	NA
	(0P1)	 Integrated design approach - the location of OWTF should be within the existing Livestock Waste Composting Plant, as far as technically feasible. The location and orientation of the OWTF should be away from landscape and visually sensitive areas such as ponds and woodlands. 								
		 Building massing – the proposed use of simple responsive design includes having specific height profile requirement 								



					Imp	lementa	tion S	tage ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Ор	Dec	Relevant Legislation & Guidelines	Impleme Status
	•	such as, single-storey, lower than the adjacent building structures, and avoiding large built structure for supporting facilities to reduce the intrusion of mass in the rural areas.	•		•				·	
		 Treatment of built structures – the structural design should seek to reduce the apparent visual mass of the facilities further through the use of natural materials such as wooden frames or other sustainable materials such as recycled plastics. 								
		 Responsive building finishes – Natural tones should be considered for the colour palette for proposed structures. Non-reflective finishes are recommended on the outward facing building facades to reduce glare effect. 								
		 Responsive lighting design – Aesthetic design of architectural and lighting with following glare design measures: 								
		 Directional and full cut off lighting is recommended within the boundaries of OWTF to minimise light spillage to the surroundings; 								
		 Minimise geographical spread of lighting, only applying for safety at the key access points and staircases; and 								
		Limited lighting intensity to meet the minimum safety and operation requirement.								
Table	Table	Amenity / Compensatory Planting	Construction site / during	Design Consultant	✓		\checkmark		Technical Circular	NA
10.8 (OP2)	8.2 (OP2)	Tree retention within the works area is considered to be important. New tree plantings will be concentrated in the proposed amenity areas along the boundaries of the site and along the exterior of OWTF buildings. Although a preliminary planting proposal is not yet available at the moment of producing this EIA Report, anticipated new tree planting within the Project site should be able to fully compensate for the loss of 14 trees proposed to be felled in terms of both quantity and quality. 441 existing trees will be retained through preserving them at their current locations. Establishment of newly planted trees is expected. Trees with high amenity value will be placed along the access routes to provide shade and soften the hard structures of OWFT buildings. Amenity plantings will utilise native tree species found on existing neighbouring slopes or	design and operation stage	/ OWTF Operator					(Works) Nos. 7/2002 and 3/2006	



					Impl	lementa	tion St	age ¹		
EIA Ref.	EM&A Ref.	Environmental Protection Measures	Location / Duration of measures / Timing of completion of measures	Implementation Agent	Des	Con	Op	Dec	Relevant Legislation & Guidelines	Implement Status
		woodland areas to improve the ecological connectivity between existing habitats and create a coherent landscape network. Tree species with aggressive roots should be avoided to prevent damage to OWTF buildings and structures. Trees with high or moderate amenity value and low to medium maintenance should be considered as part of landscape resource enhancement. Recommended tree species include <i>Celtis sinensis</i> and <i>Liquidambar formosana</i> . These proposals will be subjected to review at detail design stage of the Project.								
Table	Table	Treatment of Slopes	Construction site / during	Design Consultant	✓	•	✓	•	GEO Publication	NA
10.8 (OP3)	8.2 (OP3)	In accordance with GEO Publication No. 1/2011 "Technical Guidelines on Landscape Treatment for Slopes", these engineering structures will be aesthetically enhanced through the use of soft landscape works including tree and shrub planting to give man-made slopes a natural appearance, blending into the natural landscape. Whip-sized plantings are preferred on the face of soil cut slopes, at the crest and toe of the slope and within bern planters. These smaller, younger plants can adapt to their new growing conditions quicker than larger sized stock and establish a naturalistic effect rapidly. Recommended tree species include Mallotus paniculatus, Broussonetia papyrifera and Alangium chinense.	design and operation stage	/ OWTF Operator					No. 1/2011 "Technical Guidelines on Landscape Treatment for Slopes	
Table 10.8 (OP4)	Table 8.2 (OP4)	Amenity enhancement Rooftop greening and vertical greening to mitigate the visual impact of taller structures can soften the façade of OWTF structures. Frameworks utilised for vertical greening should appear naturalistic.	Construction site / during design and operation stage	Design Consultant / OWTF Operator	√		√		Technical Circular (Works) No. 7/2002	NA

Remarks:

Legend: V = implemented; x = not implemented; a = partially implemented; x = pending to be implemented; x = not implemented;

^{1.} Des – Design Stage, C – Construction Stage, O – Operation, Dec - Decommissioning